



PATENTS ONLY  
Attorney's Do. No. 2705-108

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



In re patent application of: Herbert M. Wildfeuer

Serial No.: (filed herewith)

Filed: (filed herewith)

For: METHOD AND APPARATUS FOR INBAND TESTING OF AN ECHO  
CANCELLER

Assistant Commissioner for Patents  
Washington, DC 20231

Please record the attached original document or copy thereof and return the recorded instrument to the undersigned.

1. Name of parties conveying an interest: (1) Herbert M. Wildfeuer

2. Name and address of party receiving an interest: Cisco Technology, Inc.  
170 West Tasman Drive  
San Jose, California 95134-1706

Description of the interest conveyed:

☒ Assignment ☐ Change of Name ☐ Security Agreement ☐ Merger

Other:

Date of execution of attached document: (1) May 25, 2000

4. Application number(s) or patent number(s). Additional sheet attached? Yes ☐ No ☒

If this document is being filed together with a new application, the execution date of the application is:

(1) May 25, 2000

A. Patent Application No.

B. Patent No.

5. Name and address of party to whom correspondence concerning document should be mailed:


Stephen S. Ford  
MARGER, JOHNSON & MCCOLLOM, P.C.  
1030 S.W. Morrison Street  
Portland, Oregon 97205  
Telephone: (503) 222-3613

6. Number of applications and patents involved: one
7. Enclosed is our check for \$1624.00, \$40.00 of which covers the recordation fee.
8. Any deficiency or overpayment should be charged or credited to deposit account number 13-1703.
9. To the best of my knowledge and belief, the foregoing information is true and correct and any attached copy is a true copy of the original document.

Dated: May 26, 2000

Respectfully submitted,

MARGER, JOHNSON  
& McCOLLOM, P.C.

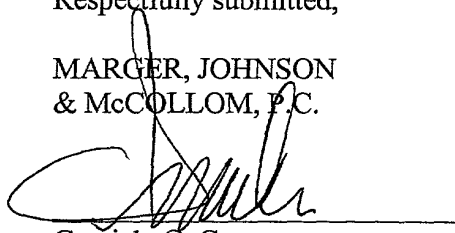

Graciela G. Cowger  
Registration No. 42,444

Total number of pages comprising  
cover sheet and attached assignment: 4

I hereby certify that this correspondence is being  
deposited with the United States Postal Service  
addressed to: Box Patent Application, Assistant  
Commissioner for Patents, Washington DC 20231  
on May 26, 2000.

Signature



Shawna Moon

# METHOD AND APPARATUS FOR INBAND TESTING OF AN ECHO CANCELLER

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

5 The invention relates generally to a system for testing performance of a telephone network echo canceller and, more specifically, to a system for inband testing of an echo canceller.

### 2. Description of the Prior Art

10 FIG. 1 is a schematic of a packet-based telephone system 12. A telephone 14 is coupled through a transmission channel 16 to a tail circuit 18. The transmission channel 16 includes a Public Branch Exchange (PBX) 20 that couples the telephone 14 to a voice packet gateway 22 in a packet-switched network 24. Another voice packet gateway 26 at another location in the packet-switched network 24 is connected through a PBX 28 to a telephone 30 in the tail circuit 18.

15 The telephone 14 is in a first location, such as San Jose, and the telephone 30 is in a second location, such as Montreal. A user of telephone 14 in San Jose may experience an echo problem when connected to the telephone 30 in Montreal. Echo is typically created when the tail circuit 18 in Montreal allows some of the audio signal from a transmission audio path 32 to leak into the audio signal on a return audio path 34. The leaking audio signal in the return audio path 34 is represented by a dotted line 36 and is perceived as echo at the San Jose telephone 14. The echo is produced by impedance mismatches in the telecommunication network. The echo is a function of how much energy is reflected back to the telephone 14 and the time delay between the original signal on audio path 32 and the reflected signal 36 on the return path 34. FIG. 4 illustrates the generally accepted boundary between acceptable and unacceptable echo. As shown in FIG. 4, user perception of echo is aggravated by circuit delay including tail circuit delay and transmission  
20 channel delay. The tail circuit 18 represents the electrical equipment, such as PBXs, telephones, microphones, transformers, etc., at the far end of the phone call to the right of the gateway 26. The tail circuit 18 shown in FIG. 1 includes any equipment in Montreal that creates the echo signal 36.

25 Referring to FIG. 2, the standard solution for eliminating echo is to introduce an echo canceller 38 in the transmission channel 16. In the case of the network shown in FIG. 2, the echo canceller 38 is included in the packet voice gateway 26 on the Montreal end of the tail circuit 18. The echo canceller 38 is controlled by management systems within the gateway 26. Alternatively, the echo canceller 38 is a standalone product.

At a first end, the packet voice gateway 22 converts audio signals from the PBX 28

into voice packets for sending over the packet switched network 24 to gateway 26. At a second end, the packet voice gateway 26 converts voice packets back into audio signals for sending to PBX 28. Echo cancellers are used in both traditional circuit switched networks, such as used in tail circuit 18, and packet switched networks, such as network 24.

5 The echo canceller 38 eliminates echo by modeling the measured echo on individual voice channels, subtracting the measured echo (echo replica) from the reflected signal, continuously adapting to the echo (convergence), recognizing the difference between echo and speech, and disabling echo cancellation when modems are used. The echo canceller 38 is typically a four-terminal device containing an adaptive Finite Impulse Response (FIR) filter  
10 (not shown). The FIR filter starts with zero knowledge about the system it is connected to, in this case, the tail circuit 18. By listening to the transmitted speech signal 32 and the echo signal 36 returning from the tail circuit 18, the adaptive filter in echo canceller 38 dynamically modifies filter coefficients to rapidly form an internal, functional model of the tail circuit 18.

15 Using this internal recipe, the echo canceller 38 produces a sample by sample estimate of the echo signal 36. This estimated echo signal is subtracted from the real echo signal 36. As the internal model in the echo canceller 38 improves over time in converging on the echo signal 36, attenuation of the echo signal 36 increases. As a result, the echo canceller 38 attenuates the echo signal 36 that normally returns to the phone 14 in San Jose while allowing the audio signal 34  
20 from a talker at phone 30 to pass through.

FIG. 3 represents a traditional echo canceller performance testbed, as described in International Telecommunications Union (ITU) specifications G.165 and G.168. The echo canceller 38 has four audio terminals. A prerecorded test signal 46 generated at excitation source 40 is input to the echo canceller 38 under test. ITU specification G.165 specifies inputting a white  
25 noise test signal 46 and ITU specification G.168 employs a variety of different test signals 46 including a pseudo-speech signal. A tail circuit emulator 42 includes a set of parallel audio delay lines 47, 48, and 50 that provide a simple three-reflector model of three different echo delays and associated echo amplitudes. Echo of the speech or noise signal 46 is generated by the tail circuit emulator 42 and fed back into the echo canceller 38. An audio recorder 44 records the level of the  
30 returning echo signal 52 allowed to pass through the echo canceller 38.

In both ITU specifications, the performance of the echo canceller 38 is rated on a purely objective standard. The performance of the echo canceller 38 is rated based on a number of parameters including the convergence time required to attenuate the echo signal 52 to a predefined

threshold, i.e., the time required to alternate the echo signal to a certain level. In other words, the less echo signal received by the recorder 44, the better the rated performance of the echo canceller 38.

A problem exists when using the G.165 and G.168 standards for measuring echo canceller performance. Implementing the G.165 and G.168 standards require precise control of the echo canceller 38 relative to the generation and transmission of the test signal and subsequent recordation of the returned echo signal 36. For example, the convergence test described in the G.168 standard requires initial clearing of the H-register —adaptive filter coefficients within the echo canceller that store the impulse response model of the echo path— and inhibiting adaptation. Adaptation is then enabled 50 ms before the start of a test signal burst (G.168 standard). In the G.165 standard, adaptation is enabled 500 ms after being disabled and after the test signal 46 is removed.

The test signal 46 is generally input at voice packet gateway 22 a first end of the transmission channel 16. The echo canceller 38, however, is controlled by the voice packet gateway 26 —if the echo canceller is part of the gateway 26— at a second end of the transmission channel 16. Accordingly, meeting the strict timing requirements of the G.165 and G.168 standards is difficult because the test signal 46 must travel through uncharacterized and often variable delay paths that do not synchronize with the control of the echo canceller 38. Also, the gateway 26 internal management systems do not have the timing precision required by the G.165 and G.168 standards to configure the echo canceller.

The same problem exists when the echo canceller 38 is a standalone product. This is because control of the stand alone echo canceller 38 resides in its internal management system that is not synchronized with the generation of the test signal 46.

Accordingly a need remains for more effectively testing echo canceller performance.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features, and advantages of the invention will become more readily apparent from the following detailed description of a preferred embodiment that proceeds with reference to the following drawings.

FIG. 1 is a prior art diagram of a telephone network.

FIG. 2 is a prior art diagram of the telephone network of FIG. 1 including an echo canceller.

FIG. 3 is diagram showing a prior art system for testing an echo canceller.

FIG. 4 is a diagram of acceptable and unacceptable echo in a telecommunication network.

FIG. 5 is a diagram of a Voice Quality Test (VQT) platform according to the present invention.

FIG. 6 is a detailed diagram of one embodiment of the VQT platform shown in FIG. 5.

FIG. 7 is a flowchart of the operation of the VQT platform shown in FIG. 6.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 5 is a schematic of a Voice Quality Test (VQT) platform 54 used for testing an echo canceller 72. The VQT platform 54, in one embodiment, is a personal computer with additional audio and signal processing hardware that allows telephone calls to be established, and audio signals to be generated and recorded across a network. The echo canceller 72 under test is located inside the transmission channel 16 between PBX 20 and PBX 28. The echo canceller 72 is either incorporated into the gateway 26 or a standalone product. When the echo canceller 72 is part of the gateway 26, the gateway controls the echo canceller. That is, the gateway's 26 management systems configure the echo canceller 72 during testing. When the echo canceller 72 is a standalone product, the echo canceller's control software layer configures the echo canceller during testing. For purposes of the foregoing description, the echo canceller 72 is assumed to be part of the gateway 26.

The VQT platform 54 is connected to the transmission network via a 4-wire interface that may be Ear and Mouth, T1/E1, or packet-based (Ethernet). FIG. 5 shows an Ear and Mouth interface. The VQT platform 54 originates and terminates a call between the two telephony interfaces of the transmission network under test.

In FIG. 5, a left side interface of the VQT platform 54 is marked caller 1. The caller 1 interface goes off-hook and dials up caller 2 on the right side interface of the VQT platform 54. Caller 2 answers the call. Once the call has been established, audio signals flow between the caller 1 interface and the caller 2 interface. The VQT platform 54 controls the four signal nodes (caller 1 mouth/ear and caller 2 mouth/ear) which originate and terminate audio signals. The caller 1 interface and the caller 2 interface may reside on the same VQT platform 54, or on two separate VQT platforms.

FIG. 6 is a more detailed version of the VQT platform 54 shown in FIG. 5. The caller 1 side includes a signal generator 62 for generating the excitation signal 64 and a recorder 82 for

recording an echo signal 84 processed through the echo canceller 72. The caller 2 side of the VQT platform 54 includes a tail-circuit emulator 74. The tail circuit emulator 74 emulates the input-output relationship seen if a phone call was actually placed to a real tail circuit, for example, in Montreal. The tail circuit emulator 74 is defined generally as a three-reflector model as described in the ITU-T G.165 and G.168 standards.

A signal 88 emerging from the caller 2 mouth node is a superposition of several delayed and attenuated versions of a signal 67 entering at the caller 2 ear node. The signal 88 is the echo signal generated as a result of impedance mismatches in the network. The echo canceller 72 generates the signal 84 by attenuating and processing the echo signal 88. During testing, the VQT platform 54 takes predetermined performance measurements, e.g., convergence time or returned echo level, of the signal 84 processed through the echo canceller 72 and recorded by recorder 82.

The signal generator 62, recorder 82, and tail circuit emulator 74 are functional blocks that can be implemented in discrete hardware components or implemented with software within the same personal computer. The software, in turn, can be implemented in a computer readable medium, e.g., a floppy disk. The implementation of the recorder 82 and tail circuit emulator 74 is known to those skilled in the art and are therefore are not described in further detail.

The signal generator 62 generates the excitation signal 64 provided to the echo canceller 72 during testing. The excitation signal 64 includes a preamble portion 66 that generally precedes a test signal portion 68. As described previously, the ITU-T G.165 standard requires the test signal portion 68 of the excitation signal 64 be white noise. In the ITU-T G.168 standard, the test signal portion 68 is pseudo-speech or a composite source signal, among other types of test signals. The test signal portion 68 under both ITU standards has a unique signature associated with it, e.g., a unique power spectrum. The preamble portion 66 is a sequence—such as a pulse code modulated sequence—capable of being differentiated from the test signal portion 66 by echo canceller 72. For example, the preamble portion 66 can have a different power spectrum than the applied test signal portion 68. The preamble portion 66 is designed so that the probability of a non-test excitation signal (i.e., a normal speech signal) containing an identical preamble is practically zero. By so designing the preamble portion 66, the embedded test control in the echo canceller 72 is always active.

The excitation signal 64 is provided to a decoder 70 in the echo canceller 72. The decoder 70 detects the presence of the preamble portion 66 and then decodes it. The preamble portion 66 includes in-band, encoded, information related to configuring and controlling the echo canceller 72 during testing. For example, the preamble portion 66 identifies the type of test—e.g.

convergence or double talk—to be performed on the echo canceller 72 and the type of test signal—e.g., noise or pseudo noise—to be provided by the signal generator 62.

As mentioned above, the ITU-T G.165 and G.168 standards include a variety of different tests that attempt to characterize the performance of the echo canceller under test. Generally, each performance test requires that the echo canceller be initialized, the test signal be applied, and a performance measurement be taken a predetermined time after the test signal is applied. The convergence test in the G.165 and G.168 standards, for example, ensures that the echo canceller converges rapidly for all combinations of input signal levels and echo paths and that the returned echo level—echo signal 84—is sufficiently low. In the convergence test, the echo canceller is initialized by clearing the H-register, inhibiting adaptation, and enabling/disabling the non-linear processor. In the G.165 standard, adaptation is disabled 500 ms after it is enabled. The combined loss is measured sometime thereafter. In the G.168 standard, adaptation is enabled 50 ms before the start of a test signal 68 burst. The combined loss is measured at this time.

A strength of the present invention is that the preamble portion 66 allows precise control of the echo canceller 72 during testing by synchronizing the test control to the location of the preamble 66. This allows exacting control of the echo canceller 72 during testing to within a single sample time of the excitation signal 64, e.g., 125 microseconds.

The preamble 66 provides the necessary information to configure and control the echo canceller 72 as required by the ITU-T G.165 and G.168 standards. In one embodiment, the preamble 66 includes information identifying the type of test to be performed and configuring the echo canceller 72 responsive to the test identification. For example, a user wishes to perform the convergence test under the G.168 standard. The signal generator 62 generates an excitation signal 64 including a preamble 66 that identifies the test as the convergence test and identifies the test portion 68 as a pseudo-noise signal as required by the G.168 standard. The echo canceller 72 receives the excitation signal 64 and decodes the preamble portion 66 using decoder 70. The decoded preamble portion 66 instructs the echo canceller to clear the H-register, inhibit adaptation, and enable/disable the non-linear processor. The decoded preamble portion 66 instructs the echo canceller 72 to manage the timing associated with the test. That is, the decoded preamble portion 66 instructs the echo canceller 72 to enable adaptation 50 ms before the start of a test portion 68 burst and takes the necessary performance measurement—combined loss in this case.

The signal generator 62 and decoder 70 are functional blocks that can be implemented in discrete hardware components or implemented with software. The software implementing the signal generator 62 would then run on a personal computer and the software implementing the



decoder 70 would run on the echo canceller 72 according to the above-described operation. In either case, the software, in turn, can be implemented in a computer readable medium, e.g., a floppy disk.

5 The VQT platform operates as shown in FIG. 7. The signal generator 62 generates an excitation signal including a preamble portion and a test portion at block 90. The excitation signal is applied to the echo canceller at block 92. The preamble portion is differentiated from the test portion (block 94) and decoded (block 96). The decoded preamble portion identifies the test to be performed to the echo canceller at block 98, e.g., convergence or double talk test. The echo canceller then configures or initializes for testing, including but not limited to clearing the H-  
10 register, inhibiting adaptation, and enabling/disabling the non-linear processor if necessary (block 100). The preamble identifies the type of test portion to the echo canceller at block 102. A performance measurement is taken at a predetermined time after receiving the excitation signal according to the performance test identified by the preamble portion.

15 Finally, those of skill in the art will appreciate that the invented method and apparatus described and illustrated herein may be implemented in software, firmware or hardware, or any suitable combination thereof. Preferably, the method and apparatus are implemented in software, for purposes of low cost and flexibility. Thus, those of skill in the art will appreciate that the method and apparatus of the invention may be implemented by a computer or microprocessor process in which instructions are executed, the instructions being stored  
20 for execution on a computer-readable medium and being executed by any suitable instruction processor. Alternative embodiments are contemplated, however, and are within the spirit and scope of the invention.

25 Having illustrated and described the principles of my invention in a preferred embodiment thereof, it should be readily apparent to those skilled in the art that the invention can be modified in arrangement and detail without departing from such principles. I claim all modifications coming within the spirit and scope of the accompanying claims.

**Claimed is:**

1. A method for testing an echo canceller, comprising:  
generating an excitation signal including a preamble portion and a test portion;  
encoding the preamble portion with configuration information relating to the echo  
5 canceller; and  
transmitting the excitation signal to the echo canceller.

2. The method of claim 1 including taking a performance measurement  
responsive to the preamble portion.

3. The method of claim 2 including measuring the combined loss a  
predetermined time before receiving the test portion.

4. The method of claim 1 including encoding instructions in the preamble portion  
15 that when executed by the echo canceller result in inhibiting adaptation and clearing a register  
in the echo canceller.

5. The method of claim 1 including encoding instructions in the preamble portion  
that when executed by the echo canceller result in disabling a processor in the echo canceller.

6. The method of claim 1 including encoding a test identifier in the preamble  
portion.

7. The method of claim 1 including encoding a test signal identifier in the  
25 preamble portion.

8. The method of claim 1 including encoding the preamble portion in such a way  
as to be capable of being differentiated from the test portion.

9. A method of testing an echo canceller, comprising:  
receiving an excitation signal including a preamble portion and a test portion;  
decoding the preamble portion; and  
controlling the echo canceller during testing responsive to the decoded preamble  
30

portion.

10. The method of claim 9 including:  
inhibiting adaptation in the echo canceller responsive to the preamble portion; and  
clearing a register in the echo canceller responsive to the preamble portion.

11. The method of claim 9 including disabling a processor in the echo canceller  
responsive to the preamble portion.

12. The method of claim 9 including identifying a test to be performed on the  
echo canceller responsive to the preamble portion.

13. The method of claim 9 including identifying a type of test signal responsive to  
the preamble portion.

14. The method of claim 9 including differentiating the preamble portion from the  
test portion.

15. The method of claim 9 including controlling the echo canceller during testing  
to within a single sample time of the excitation signal.

16. The method of claim 15 including controlling the echo canceller during testing  
to within 125 microseconds.

17. A system for testing an echo canceller, comprising:  
signal generating means for generating an excitation signal including a preamble  
portion and a test portion; and  
controller means for controlling the echo canceller during testing according to the  
preamble portion.

18. The system of claim 17 including:  
tail circuit emulating means for generating an echo back signal responsive to the test  
portion of the excitation signal; and

recording means for recording any received echo signal allowed to pass through the echo canceller.

19. The system of claim 17 wherein the preamble portion sets timing associated with performance tests defined in ITU-T G.165 and G.168 standards.

20. The system of claim 17 wherein the preamble portion identifies a type of test portion.

21. The system of claim 17 wherein the preamble portion identifies a performance test.

22. The system of claim 17 wherein the preamble portion is a correlated pulse code modulated sequence capable of being differentiated from the test portion of the excitation signal.

23. A system for testing an echo canceller, comprising:  
signal receiving means for receiving an excitation signal including a preamble portion and a test portion; and

decoding means for obtaining configuration information by decoding the preamble portion.

24. The system of claim 23 wherein the echo canceller includes an H-register and a non-linear processor and wherein the configuration information includes any of the following:

instructions related to the management of the H-register;  
instructions related to the management of the non-linear processor;  
instructions related to an adaptation function in the echo canceller; and  
timing information related to any of the aforementioned instructions.

25. The system of claim 23 wherein the decoding means differentiates the preamble portion from the test portion.

26. A system for testing an echo canceller, comprising:  
a signal generator for generating an excitation signal including a preamble portion and  
a test portion; and  
a controller for controlling the echo canceller during testing according to the preamble  
portion.

27. The system of claim 26 including:  
a tail circuit emulating for generating an echo back signal responsive to the test  
portion of the excitation signal; and  
a recorder for recording any received echo signal allowed to pass through the echo  
canceller.

28. The system of claim 26 wherein the preamble portion sets timing associated  
with performance tests defined in ITU-T G.165 and G.168 standards.

29. The system of claim 26 wherein the preamble portion identifies a type of test  
portion.

30. The system of claim 26 wherein the preamble portion identifies a performance  
test.

32. The system of claim 26 wherein the preamble portion is a correlated pulse  
code modulated sequence capable of being differentiated from the test portion of the  
excitation signal.

32. An echo canceller, comprising:  
a receiver for receiving an excitation signal including a preamble portion and a test  
portion; and  
a decoder for decoding the preamble portion, the decoded preamble portion  
configuring the echo canceller during testing.

33. The echo canceller of claim 32 wherein the decoder differentiates the  
preamble portion from the test portion.

34. The echo canceller of claim 32 wherein the decoder extracts control information from the preamble portion and wherein the controller controls the echo canceller responsive to the control information.

5

35. The echo canceller of claim 32 wherein the preamble portion identifies the test portion.

10

36. The echo canceller of claim 32 wherein the preamble portion identifies a test to be performed on the echo canceller.

37. A computer readable medium having stored thereon instructions, that, when executed by a computing device, result in:

generating an excitation signal having a preamble portion and a test portion; and  
controlling an echo canceller responsive to the preamble portion.

15

38. The computer readable medium of claim 37 including measuring a performance parameter a predetermined time before application of the test portion.

20

39. The computer readable medium of claim 37 including measuring a combined loss a predetermined time before receiving the test portion.

40. The computer readable medium of claim 37 including encoding information identifying a type of test in the preamble portion.

25

41. The computer readable medium of claim 37 including encoding information identifying a type of test portion in the preamble portion.

30

42. The computer readable medium of claim 37 including encoding the preamble portion such that it is distinguishable from the test portion.

43. A computer readable medium having stored thereon instructions, that, when executed by a computing device, result in:

receiving an excitation signal including a preamble portion and a test portion; and  
decoding the preamble portion, the preamble portion configuring the echo canceller  
during testing.

5           44.     The computer readable medium of claim 43 including:  
              inhibiting adaptation in the echo canceller responsive to the preamble portion; and  
              clearing a register in the echo canceller responsive to the preamble portion.

              45.     The computer readable medium of claim 43 including disabling a processor in  
10     the echo canceller responsive to the preamble portion.

              46.     The computer readable medium of claim 43 including identifying a test to be  
performed on the echo canceller responsive to the preamble portion.

15           47.     The computer readable medium of claim 43 including identifying a type of  
test signal responsive to the preamble portion.

              48.     The computer readable medium of claim 43 including differentiating the  
preamble portion from the test portion.

# METHOD AND APPARATUS FOR INBAND TESTING OF AN ECHO CANCELLER

## ABSTRACT

Provided is a method and apparatus for inband testing of an echo canceller. The apparatus includes a signal generator for generating an excitation signal including a preamble portion and a test portion. The echo canceller receives the excitation signal at a decoder. The decoder differentiates the preamble from the test portion and obtains control information by decoding the preamble portion. A controller configures the echo canceller during testing according to the control information obtained from the preamble portion. A strength of the present invention is that the preamble portion allows precise control of the echo canceller during testing by synchronizing the test control to the location of the preamble. This allows exacting control of the echo canceller during testing to within a single sample time of the excitation signal, e.g., 125 microseconds. The control information includes any of the following: instructions related to the management of the H-register, instructions related to the management of the non-linear processor, instructions related to an adaptation function in the echo canceller, and timing information related to any of the aforementioned instructions. The preamble further identifies the test to be performed on the echo canceller and the type of test portion.



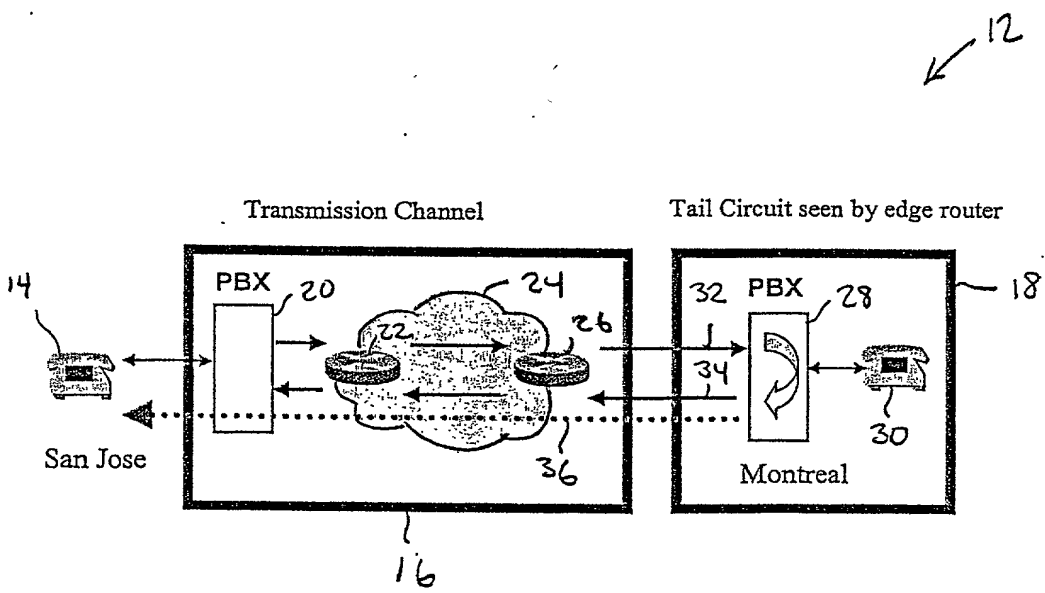


FIG.1  
(PRIOR ART)

12

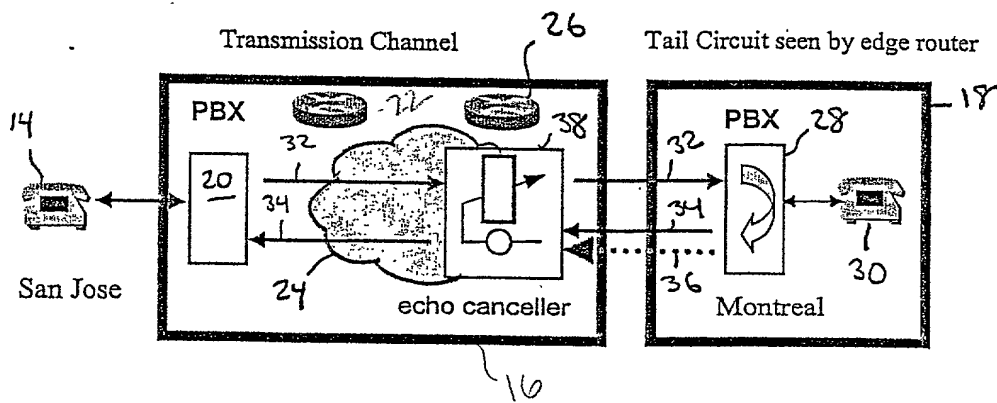


FIG.2  
(PRIOR ART)

excitation source 40

22

pseudo-speech or noise 46

38

26

Tail Circuit Emulator 42

$Z^{-N1}$  47

$Z^{-N2}$  48

$Z^{-N3}$  50

echo signal 52

record 44

echo canceller under test

FIG. 3  
(PRIOR ART)

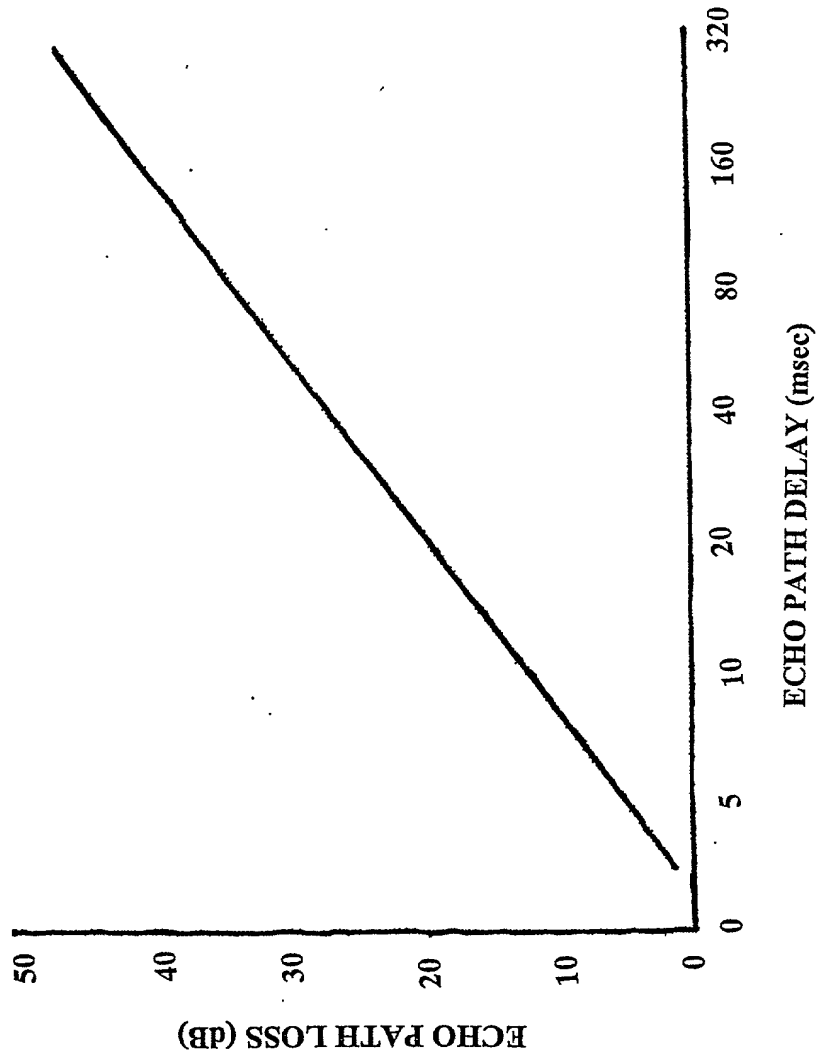


FIG. 4


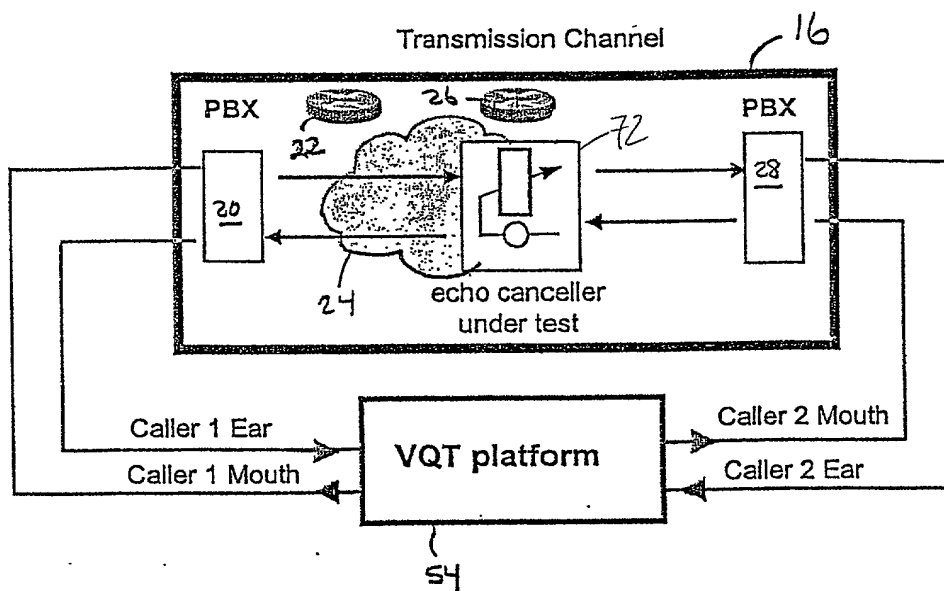


FIG. 9



FIG. 7

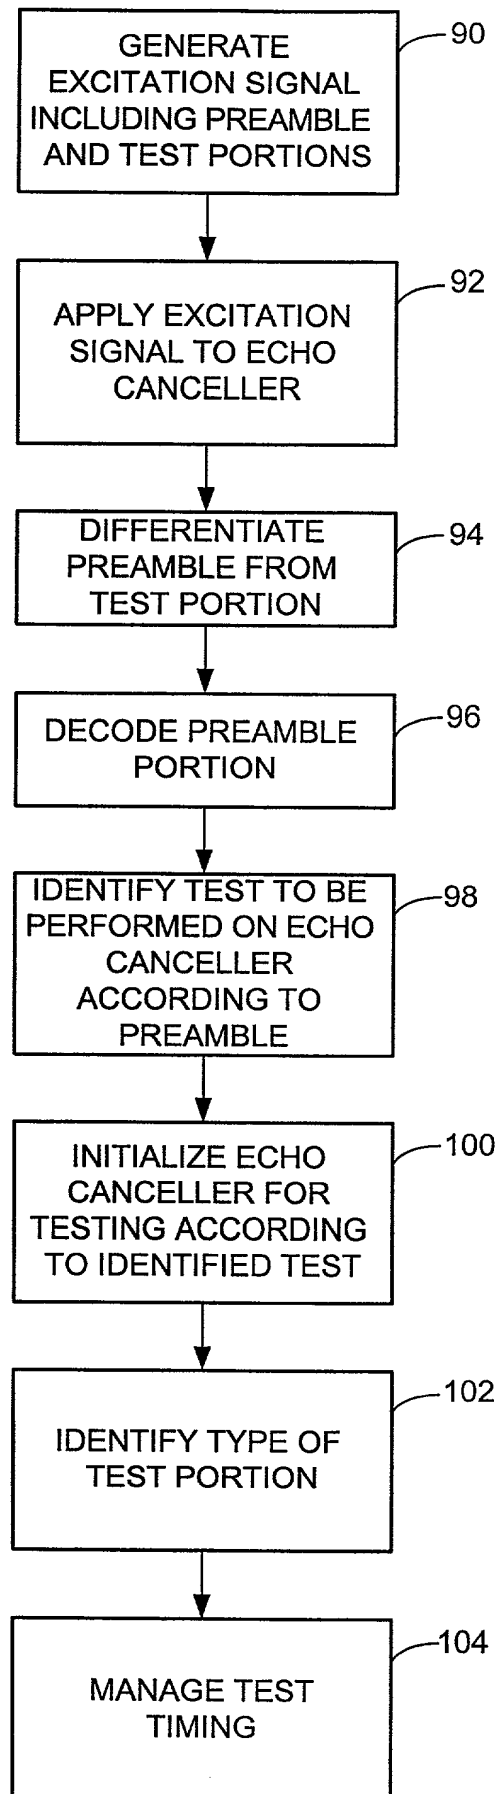

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND APPARATUS FOR INBAND TESTING OF AN ECHO CANCELLER, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Sec. 119 (a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Claiming Priority?	
			<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Sec. 119(e) of any United States provisional application listed below:

<u>Provisional Application No.</u>	<u>Filing Date</u>

I hereby claim the benefit under Title 35, United States Code, Sec. 120 or §365(c) of any PCT international application designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Sec. 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56 which



occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>(Application No.)</u>	<u>(Filing Date)</u>	<u>(Status) (patented, pending, abandoned)</u>
--------------------------	----------------------	--

I hereby appoint the following attorneys to prosecute the application, to file a corresponding international application, to prosecute and transact all business in the Patent and Trademark Office connected therewith:

Customer No. 20575

<u>Attorney Name</u>	<u>Registration No.</u>
Jerome S. Marger	26,480
Alexander C. Johnson, Jr.	29,396
Alan T. McCollom	28,881
James G. Stewart	32,496
Glenn C. Brown	34,555
Stephen S. Ford	35,139
Gregory T. Kavounas	37,862
Scott A. Schaffer	38,610
Joseph S. Makuch	39,286
James E. Harris	40,013
Graciela G. Cowger	42,444
Ariel Rogson	43,054
Craig R. Rogers	43,888

Direct all telephone calls to Graciela G. Cowger at (503) 222-3613 and send all correspondence to:

Marger Johnson & McCollom, P.C.  
1030 SW Morrison Street  
Portland, OR 97205

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

---

Inventor's signature:

Citizenship: US

Post Office address: 3107 Lucinda Lane, Santa Barbara, CA 93105

5/25/2000  
(Date)

*(The following are the names of the persons who have been elected to the various offices of the Association, as reported by the Secretary.)*